



SAW Components

SiMic MEMS microphone

Series/type:	C928A
Ordering code:	
Date:	September 27, 2013
Version:	1.1

SiMic MEMS microphone

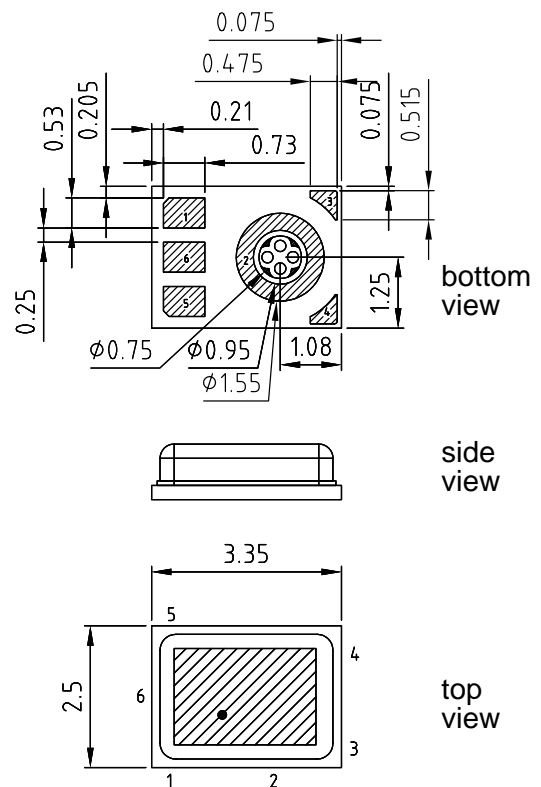
Preliminary data


Applications

- Microphone designed for mobile phones, headsets, PDAs, notebooks and cameras

Features

- **Surface Mounted Technology (SMT)**
- Reflow soldering up to 260 °C
- RoHS compatible, Ni/Au-plated terminals suited for lead free soldering
- Size of 3.35 × 2.5 mm²
- Low height of typ. 1.07 mm (next version: 0.98 mm)
- Approximate weight of 16 mg
- Sound hole on bottom side
- High long-term temperature stability
- Balanced operation
- Very high signal to noise ratio of 66 dB(A)
- Wide dynamic range up to 135 dB SPL
- Positive polarity


Pin configuration

- 1 OUTP (balanced output +)
- 2 GND (ground)
- 3,4 KOA (keep out area, not connected, no structure on PCB recommended)
- 5 V_{DD} (power)
- 6 OUTN (balanced output -)

SiMic MEMS microphone

Preliminary data


Acoustical and electrical characteristics (output measured differentially)

Ambient temperature of test conditions: $T_A = 25\text{ °C}$
 Output load: $Z_L = 200\text{ k}\Omega$
 Supply voltage: $V_{DD} = 2.75\text{ V}$

All voltages refer to ground

		Min.	Typ.	Max.	Unit	Note or test condition
Sensitivity 1 kHz	$S_{1\text{kHz}}$	-41	-38	-35	dBV/Pa	94 dB SPL
Signal to noise ratio	SNR	64	66	—	dB(A)	
Total harmonic distortion	THD	—	—	1	%	110 dB SPL, 1 kHz
		—	1	—	%	132 dB SPL, 1 kHz
		—	10	—	%	135 dB SPL, 1 kHz
Power supply rejection ratio	PSRR ¹⁾	—	67	—	dB	20 Hz to 20 kHz sine wave 100 mV _{pp}
		—	tbd	—	dB	1 MHz to 100 MHz sine wave 100 mV _{pp}
Current consumption	I_{CC}	—	135	—	μA	
Output impedance		—	450	—	Ω	OUTP to OUTN
		—	225	—	Ω	OUTP ac coupled to GND
		—	225	—	Ω	OUTN ac coupled to GND

$$1) \text{ PSRR} = 20 \cdot \log \frac{V_{\text{Disturb}}}{V_{\text{OUT}}}$$

SiMic MEMS microphone

Preliminary data


Start up behavior

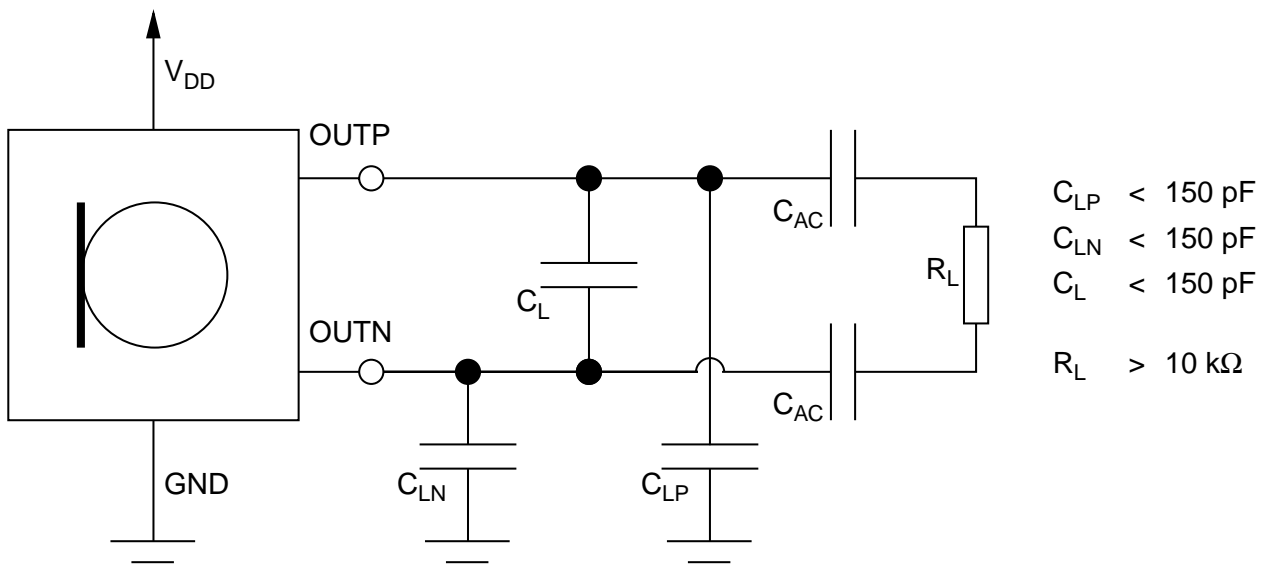
		Max.	Unit	Condition
Settling time after (re-) power on	t_s	50	ms	$ \Delta\text{Sens}_{\text{max}} < 0.5 \text{ dB}$
		500	ms	$ \Delta\text{Sens}_{\text{max}} < 0.2 \text{ dB}$

Maximum ratings

Operable temperature range	T_A	-40 ... +85	°C	
Storage temperature range	T_{STG}	-40 ... +125	°C	
Storage temperature range	T_{STGT}	0 ... +60	°C	stored in tape
Operable power supply voltage	V_{DD}	1.52 ... 3.60	V	
Power supply voltage	V_{DD}	0 ... 5.5	V	without risk of damage
ESD capability HBM	$V_{\text{ESD_HBM_EXT}}$	2000 ¹⁾	V	any pin
ESD capability MM	$V_{\text{ESD_MM_EXT}}$	200 ²⁾	V	any pin

1) according to JESD22-A115A

2) according to JESD22-A114E

Application example


Minimum output load impedance: 10 kΩ

SiMic MEMS microphone

Preliminary data



Cautions and warnings

- Vacuum on the bottom side of a device with a sound inlet hole has to be avoided
- Compressed air and liquid cleaners should not be used around the area of the sound inlet hole
- The sound inlet hole must not be covered with solder
- The maximum number of reflows should not exceed three

References

Type	C928A
Ordering code	
Marking and package	
Packaging	
Date codes	L_1126
Soldering profile	S_6001
Qualification test procedure	S_0308
RoHS compatible	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8 th , 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com.

Published by EPCOS AG
Systems, Acoustics, Waves Business Group
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2013. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the “General Terms of Delivery for Products and Services in the Electrical Industry” published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.